


# TECHNICAL INFORMATION SHEET

## QuickScrubber™ Plus Application System

Item Description  
QuickScrubber Plus Kit

Item Number  
W563582049

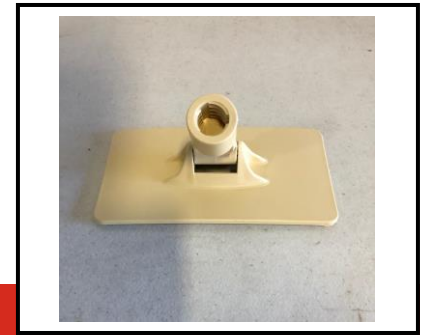

### Product Information

#### Description:

The Firestone QuickScrubber Plus primer application system consists of a scrub pad and holder that allows the application of Firestone QuickPrime™ Primers from a standing position. The QuickScrubber Plus scrub pad is secured in place to the bottom of the holder and has a fitting to accept an extension handle (handle not included). Pads for the QuickScrubber Plus system are included with each kit.

The bottom-bearing surface of the QuickScrubber Plus holder is slightly concave. When proper pressure is applied, the handle flattens out against the priming surface, assuring that proper pressure is maintained.

#### Method of Application:

1. Install a QuickScrubber Plus pad on the bottom of the handle by pressing the pad onto the Velcro® strips with firm hand pressure.
2. Use back and forth strokes with heavy pressure along the length of the splicing area, until membrane surfaces become dark gray in color with no streaking or puddling.
3. Bear down on the QuickScrubber Plus pad and handle system during application so the pad holder flattens to allow the total surface to contact with the priming surface.
4. Each pad will prime about 100 - 200 feet (30 - 61 m) by 6" - 7" (152.4 mm - 177.8 mm) wide area.
5. Change pads routinely. Do not attempt to turn pads over and re-use. Discard after 100 - 200' (30.5 - 61 m) of priming.
6. Additional application instructions on the use of Firestone Primers and QuickScrubber Plus can be found on our website at [www.firestonebpco.com](http://www.firestonebpco.com).

#### Precautions:

Keep all pads clean and dry prior to use.

### Packaging

QuickScrubber Plus Kit	4 handles and 20 pads per carton; 144 cartons per pallet	
Additional Information	QuickScrubber and QuickScrubber Plus handles and pads are packaged with various QuickSeam products as follows:	
	3" (76.2 mm) QuickSeam™ Tape	1 QuickScrubber + holder / 3 QuickScrubber + pads; and 1 standard QuickScrubber holder / 3 standard QuickScrubber pads
	6" (152.4 mm) and 7" (177.8 mm) QuickSeam Tape	1 QuickScrubber + holder / 1 QuickScrubber + pad; and 1 standard QuickScrubber holder / 1 standard QuickScrubber pad
	6" (152.4 mm) QuickSeam Batten Cover	1 QuickScrubber + holder / 2 QuickScrubber + pads
	5" (127 mm) QuickSeam Flashing	1 QuickScrubber + holder / 2 QuickScrubber + pads

## TECHNICAL INFORMATION SHEET

# QuickScrubber™ Plus Application System

### Typical Properties

Property	Value
<b>QuickScrubber Plus Handle</b>	
Handle Base	High quality plastic, with slight upward camber
Color	Beige
Pad Holding Mechanism	Industrial grade Velcro strips
Handle Acceptor	Standard broom thread with swivel
<b>QuickScrubber Plus Pad</b>	
Base	Nylon fibers with abrasive grain bound with solvent resistant resins
Dimensions	3.5" (88.9 mm) x 7" (177.8 mm) x 0.5" (12.7 mm)
Color	Gray
Grit	240
Weight	35 oz (992 g)

Please contact Firestone Technical Services Department at 1-800-428-4511 for further information.

*This sheet is meant to highlight Firestone products and specifications and is subject to change without notice. Firestone takes responsibility for furnishing quality materials which meet published Firestone product specifications or other technical documents, subject to normal roof manufacturing tolerances. Neither Firestone nor its representatives practice architecture. Firestone offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. Firestone accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Firestone representative is authorized to vary this disclaimer.*